

# LVS/LVR

Stainless Steel Vertical Multistage Pump



## Application

- Suitable for transferring liquids of low viscosity, non-inflammable and non-explosive, not containing solid particles or fibers
- Water supply & drainage for high-rise buildings, filtration and transfer at waterworks, pressure boosting in main pipe
- Washing and cleaning systems, boiler feeding, cooling water circulation, water treatment systems, auxiliary system, support equipment
- Ultra-filtration systems, reverse-osmosis systems, distillation systems, separators, swimming pools
- Agricultural irrigation: sprinkler irrigation, drip-feed irrigation
- Food & beverage industry
- Fire-fighting system


## Operating Conditions

- Low viscosity, non-inflammable and non-explosive liquids not containing solid particles or fibers. The liquids must not chemically attack the pump materials. When pumping liquids with a density or viscosity is higher than that of water, a motor with a higher output power rating shall be used.
- Liquid temperature: -20°C ~ +120°C
- Flow range: 0.7-240 m<sup>3</sup>/h
- Liquid pH value: 4 ~ 10
- Max. ambient temperature: +40°C
- Max. operation pressure: 33 bar
- Altitude: up to 1000 m

## Motor

- IE 2 motor (IE 3 motor optional)
- Totally enclosed & fan-cooled
- Protection class: IP55
- Standard voltage: 50Hz: 1 × 220V/3 × 380V

## Identification Codes

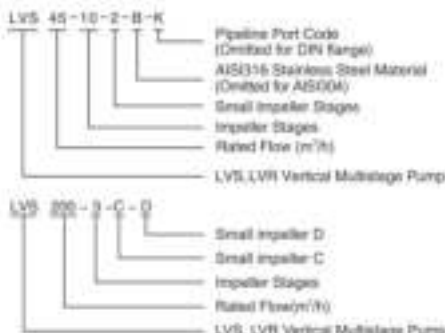

LVS: Stainless steel wetted parts

LVR: Cast iron base & pump cover

Identifications codes of flange structure


A: Dual flange; K: Clamp connector;

G: Threaded connector

## Ambient Temperature

Max. ambient temperature: +40°C. Ambient temperature above 40°C or installation at altitude of more than 1000 meters above sea level requires the use of an oversize motor. Because of low air density and poor cooling effects, the motor output power P<sub>2</sub> will be decreased. See the picture.

In such cases, it may be necessary to use a motor with a higher output power rating.

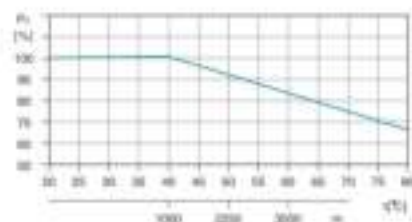

For example, when the pump is installed at altitude of more than 2500 meters above sea level, P<sub>2</sub> will be decreased to 88%. When the ambient temperature is 70°C, P<sub>2</sub> will be decreased to 78%.

## Minimum Inlet Pressure-Npsh


Calculation of the inlet pressure 'H' is recommended in these situations:

- The liquid temperature is high.
- The flow is significantly higher than the rated flow.
- Water is drawn from depths.
- Water is drawn through long pipes.
- Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump. The maximum suction lift 'H' in meters head can be calculated as follows:

H	= P <sub>2</sub> - 10.2 · NPSH - H <sub>f</sub> - H <sub>v</sub>
P <sub>2</sub>	= Barometric pressure in bar. (Barometric pressure can be set to 1 bar). In closed systems, P <sub>2</sub> indicates the system pressure in bar.
NPSH	= Net Positive Suction Head in meters head. (To be read from the NPSH curve at the highest flow the pump will be delivering.)
H <sub>f</sub>	= Friction loss in suction pipe in meters head. (At the highest flow the pump will be delivering.)
H <sub>v</sub>	= Vapor pressure in meters head. (To be read from the vapor pressure scale, 'H <sub>v</sub> ' depends on the liquid temperature 't <sub>m</sub> ').
H <sub>s</sub>	= Safety margin - minimum 0.5 meters head.

If the 'H' calculated is positive, the pump can operate at a suction lift of maximum 'H' meters head. If the 'H' calculated is negative, an inlet pressure of minimum 'H' meters head is required.

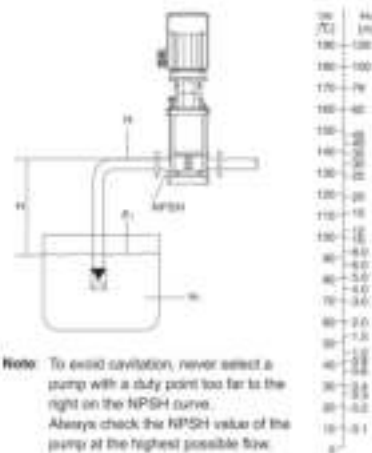

**Note:** To avoid cavitation, never select a pump with a duty point too far to the right on the NPSH curve. Always check the NPSH value of the pump at the highest possible flow.

## Maximum Inlet Pressure

The following table shows the maximum permissible inlet pressure. However, the current inlet pressure + the pressure against a closed valve must always be lower than the Max. permissible operating pressure.


If the maximum permissible operating pressure is exceeded, the bearing in the motor may be damaged and the life of the shaft seal reduced.

Model	Maximum Inlet Pressure [bar]
<b>LVS/LVR</b>	
1-2	10
<b>LVR/LVR</b>	
2-2	8
2-3	10
2-13	15
<b>LVR/LVR</b>	
3-2	10
3-31	15
<b>LVR/LVR</b>	
4-2	8
4-3	10
4-12	15
<b>LVR/LVR</b>	
5-2	10
5-18	15
<b>LVR/LVR</b>	
10-1	8
10-7	10
<b>LVR/LVR</b>	
15-1	8
15-4	10
<b>LVR/LVR</b>	
20-1	8
20-4	10
<b>LVR/LVR</b>	
32-1-1	4
32-5-2	10
32-11	15
<b>LVR/LVR</b>	
45-1-1	4
45-3-2	10
45-8-2	15
<b>LVR/LVR</b>	
64-1-1	4
64-2-1	10
64-6-1	15
<b>LVR/LVR</b>	
90-1-1	4
90-2-2	10
90-3	15
<b>LVR/LVR</b>	
120-1	10
120-2	15
120-8	20
<b>LVR/LVR</b>	
150-1-1	10
150-2-1	15
150-4	20
<b>LVR/LVR</b>	
200-1-D	10
200-1-C	15
200-2-C	20

# LVS/LVR

Stainless Steel Vertical  
Multistage Pump

## How to Read The Curve Charts

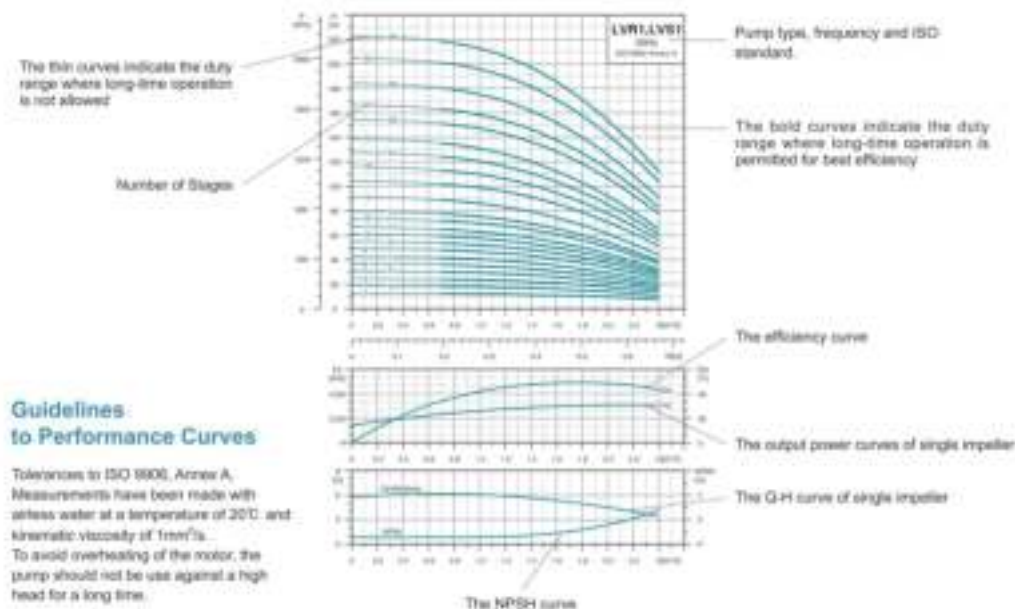


## Guidelines to Performance Curves

Tolerances to ISO 9906, Annex A. Measurements have been made with deionised water at a temperature of 20°C and kinematic viscosity of 1mm<sup>2</sup>/s. To avoid overheating of the motor, the pump should not be used against a high head for a long time.

## Minimum Flow Rate

Due to the risk of overheating, the pump should not be used at a flow below the minimum flow rate. The curve below shows the minimum flow rate as a percentage of the nominal flow rate in relation to the liquid temperature.


Air cooling apparatus

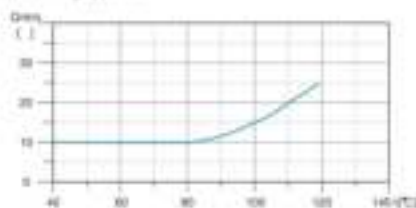

Note: The outlet valve must be opened when the pump is in operation.

## Terminal Box Positions


(Note: set to position 1 before delivery)

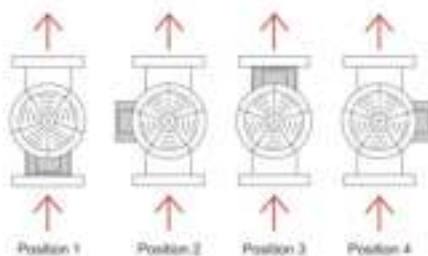

## Product Range

MODEL	LVS/LVR															
DESCRIPTION	LVR21	LVR22	LVR23	LVR24	LVR25	LVR210	LVR215	LVR220	LVR230	LVR240	LVR250	LVR260	LVR270	LVR280	LVR290	LVR2100
Rated flow (m <sup>3</sup> /h)	1	2	3	4	5	10	15	20	30	40	50	60	90	130	150	200
Flow range (m <sup>3</sup> /h)	0.7-2.4	1.0-3.3	1.2-4.3	1.5-4	2.0-5.5	3-15	5-25	7.5-25	10-40	13-48	20-60	25-80	35-100	50-150	60-180	100-240
Max. pressure (bar)	20	20	20	21	24	30	35	35	35	35	35	35	35	35	35	35
Motor power (kW)	0.37-0.2	0.2-0	0.3-0	0.37-4	0.27-4	1.1-7.5	1.1-10	1.1-10	1.5-30	2-45	4-45	5.5-45	11-75	11-75	15-75	18.5-110
Temperature (°C)	-20°C - +120°C (Note: Both the Max. permissible pressure and liquid temperature range refer to the pump capacity)															
Max. pump efficiency (%)	45	45	55	55	60	60	70	70	75	75	80	81	75	75	75	75
Pipe connection-LVS																
Oral flange	G1	G1	G1	G1 1/4	G1 1/4	-	-	-	-	-	-	-	-	-	-	-
DN Range	DN25	DN25	DN25	DN32	DN32	DN40	DN50	DN60	DN80	DN80	DN100	DN100	DN125	DN125	DN150	DN150
Pipe connection-LVR																
Oral flange	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DN Range	DN20	DN20	DN20	DN25	DN25	DN40	DN50	DN60	DN80	DN80	DN100	DN100	DN125	DN125	DN150	DN150
Clamp connector	ø40	ø40	ø40	ø40	ø40	-	-	-	-	-	-	-	-	-	-	-
Threaded connector	G1 1/4	G1 1/4	G1 1/4	G1 1/4	G1 1/4	-	-	-	-	-	-	-	-	-	-	-


## Scope of Performance-LVR,LVS

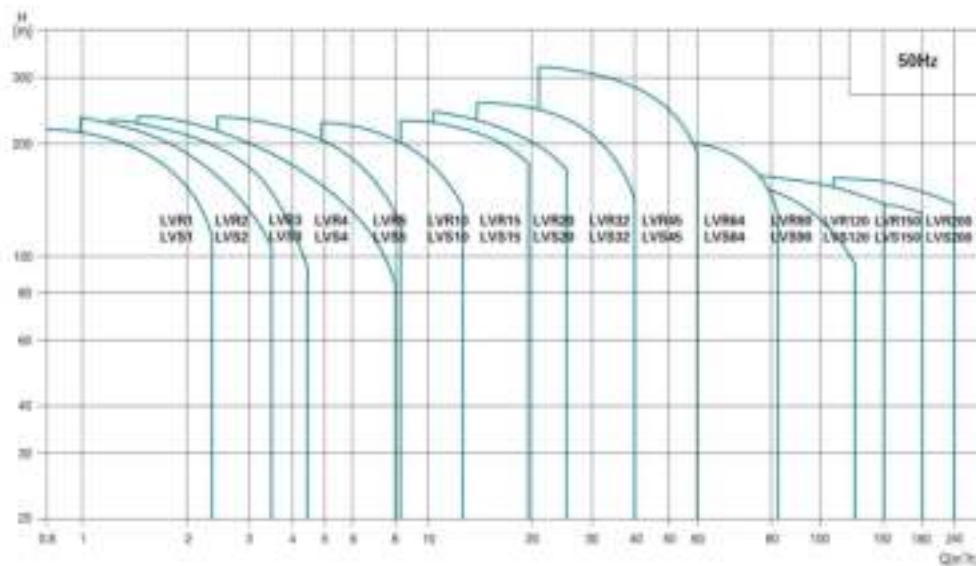

# LVS/LVR


Stainless Steel Vertical  
Multistage Pump

## Cross Section




MODEL LVR11224B

Part	Material
1 Base plate	HT200
2 Gearing/shaft assembly	AISI304
3 Impeller with seal	AISI304
4 Diffuser with bearing	AISI304
5 Medium diffuser	AISI304
6 Impeller	AISI304
7 First stage	AISI304
8 Motor base	HT200
9 Filling plug	AISI304
10 Coupling	for external coupling
11 Motor	
12 Coupling plate	AISI304
13 Cartridge seal	
14 VERT plug assembly	AISI304
15 Pump cover	AISI304
16 Pump shaft	AISI304
17 Seal garter	HT200



MODEL LVR11224C

Part	Material	Optional Material
1 Base plate	HT200	AISI316
2 Gearing/shaft assembly	AISI304	Z1115
3 Impeller	AISI304	AISI316
4 Primary diffuser	AISI304	AISI316
5 Diffuser with bearing	AISI304	AISI316
6 Medium diffuser	AISI304	AISI316
7 Impeller	AISI304	AISI316
8 First stage	AISI304	AISI316
9 Motor base	HT200	AISI316
10 Filling plug	AISI304	AISI316
11 Coupling	for external coupling	
12 Motor		
13 Coupling plate	AISI304	
14 Cartridge seal		
15 VERT plug assembly	Z1115	Z1115
16 Pump cover	AISI304	AISI316
17 Pump shaft	AISI304	AISI316
18 Seal garter	AISI304	AISI316



MODEL LVR12424B

Part	Material
1 Base plate	HT200
2 Flange	Z1115
3 Gearing/shaft assembly	AISI304
4 Primary diffuser	AISI304
5 Diffuser with bearing	AISI304
6 Impeller	AISI304
7 Seal gland assembly	
8 First stage	AISI304
9 VERT plug assembly	AISI304
10 Motor base	HT200
11 Motor	
12 Coupling plate	AISI304
13 Coupling	Z1115
14 Cartridge seal	
15 VERT Plug head	HT200
16 Filling plug	AISI304
17 Motor plate	AISI304
18 Pump cover	AISI304
19 Pump shaft	AISI304




MODEL LVR12424C

Part	Material	Optional Material
1 Base plate	HT200	
2 Flange	Z1115	AISI316
3 Gearing/shaft assembly	AISI304	AISI316
4 Primary diffuser	AISI304	AISI316
5 Medium diffuser	AISI304	AISI316
6 Diffuser with bearing	AISI304	AISI316
7 Impeller	AISI304	AISI316
8 Seal gland assembly		
9 First stage	AISI304	AISI316
10 VERT plug assembly	AISI304	AISI316
11 Motor base	HT200	
12 Motor		
13 Coupling plate	AISI304	
14 Coupling	Z1115	
15 Cartridge seal		
16 VERT Plug head	Z1115	AISI316
17 Filling plug	AISI304	AISI316
18 Motor plate	AISI304	AISI316
19 Pump cover	AISI304	AISI316
20 Pump shaft	AISI304	AISI316




MODEL LVR11212B

Part	Material
1 Base	HT200
2 Gearing/shaft assembly	AISI304
3 Impeller	AISI304
4 Diffuser with bearing	AISI304
5 Medium diffuser	AISI304
6 Impeller	AISI304
7 First stage	AISI304
8 Filling plug	AISI304
9 Motor base	HT200
10 Coupling	for external coupling
11 Motor	
12 Coupling plate	AISI304
13 Cartridge seal	
14 VERT plug assembly	AISI304
15 Pump cover	AISI304
16 Pump shaft	AISI304




MODEL LVR11212C

Part	Material	Optional Material
1 Base plate	HT200	AISI316
2 Gearing/shaft assembly	AISI304	Z1115
3 Impeller	AISI304	AISI316
4 Primary diffuser	AISI304	AISI316
5 Diffuser with bearing	AISI304	AISI316
6 Medium diffuser	AISI304	AISI316
7 Impeller	AISI304	AISI316
8 First stage	AISI304	AISI316
9 Filling plug	AISI304	AISI316
10 Motor base	HT200	
11 Coupling	for external coupling	
12 Motor		
13 Coupling plate	AISI304	
14 Cartridge seal		
15 VERT plug assembly	AISI304	AISI316
16 Pump cover	Z1115	AISI316
17 Pump shaft	AISI304	AISI316
18 Pump garter	AISI304	AISI316
19 Flange	Z1115	



MODEL LVR12412B



Part	Material
1 Base plate	HT200
2 Flange	Z1115
3 Motor	HT200
4 Primary diffuser	AISI304
5 Medium diffuser	AISI304
6 Diffuser with bearing	AISI304
7 Impeller	AISI304
8 First stage	AISI304
9 Pump head	HT200
10 Motor base	HT200
11 Motor	
12 Coupling	Z1115
13 Coupling plate	AISI304
14 Cartridge seal	
15 Filling plug	AISI304
16 Motor plate	AISI304
17 Pump cover	AISI304
18 Pump shaft	AISI304




MODEL LVR12412C

Part	Material	Optional Material
1 Base plate	HT200	
2 Flange	Z1115	AISI316
3 Gearing/shaft assembly	AISI304	AISI316
4 Primary diffuser	AISI304	AISI316
5 Medium diffuser	AISI304	AISI316
6 Diffuser with bearing	AISI304	AISI316
7 Impeller	AISI304	AISI316
8 First stage	AISI304	AISI316
9 Pump head	Z1115	AISI316
10 Motor base	HT200	
11 Motor		
12 Coupling	Z1115	
13 Coupling plate	AISI304	
14 Cartridge seal		
15 Filling plug	AISI304	AISI316
16 Motor plate	AISI304	AISI316
17 Pump cover	AISI304	AISI316
18 Pump shaft	AISI304	AISI316

**Hydraulic Performance Curves**

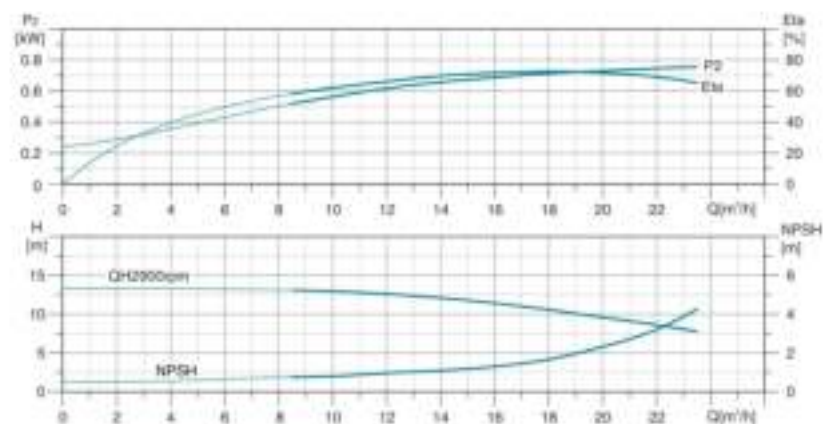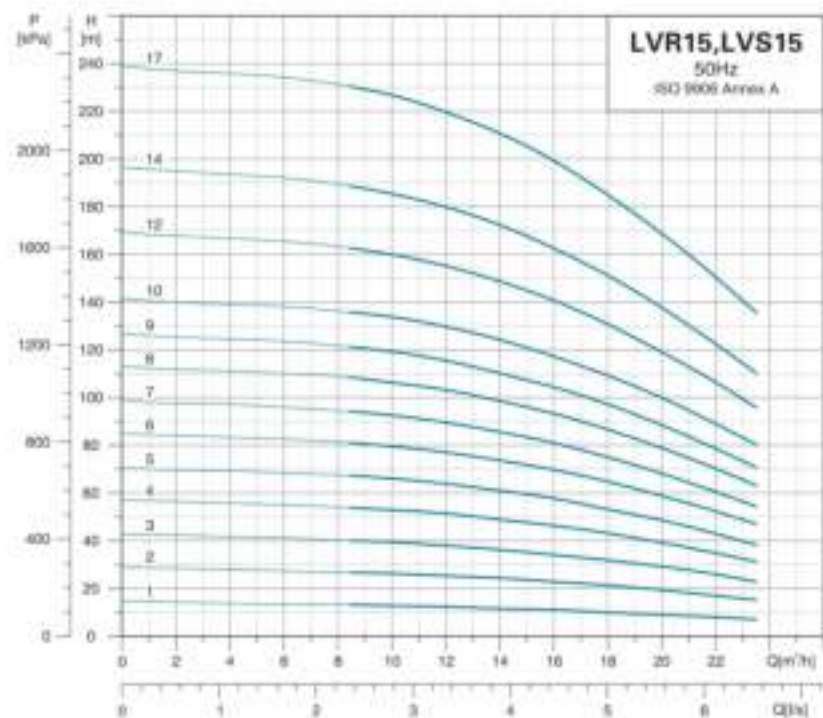

**Dimension Drawing**

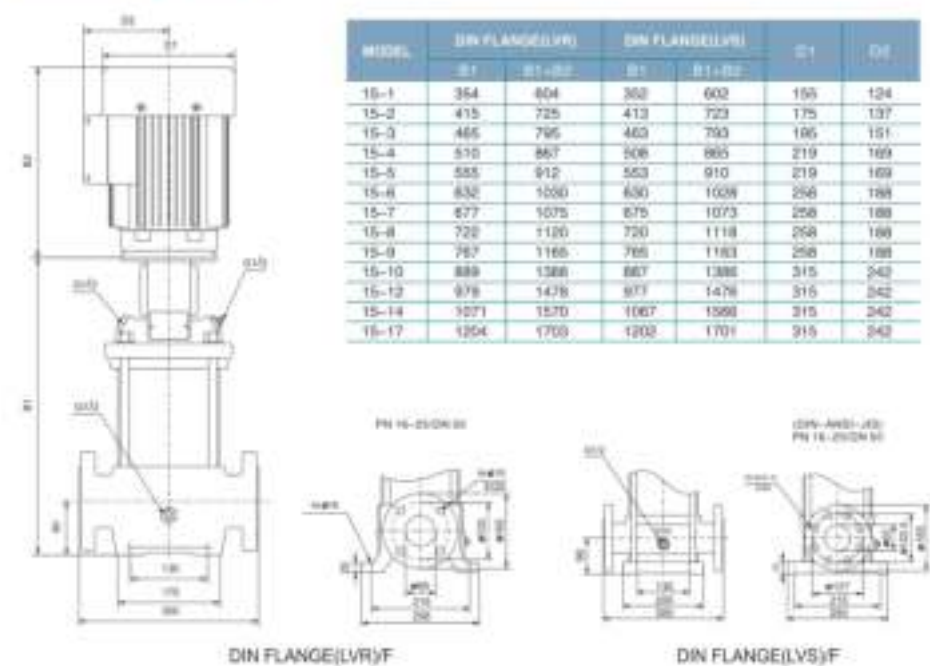

MODEL	DIN FLANGE(LVR)		DIN FLANGE(LVS)		D1	D2
	B1	B1+D2	B1	B1+D2		
15-1	354	604	352	602	195	124
15-2	415	725	413	723	175	137
15-3	465	795	463	793	195	151
15-4	510	867	508	865	219	169
15-5	555	912	553	910	219	169
15-6	632	1000	630	1000	250	188
15-7	677	1075	675	1073	258	188
15-8	720	1120	720	1118	268	188
15-9	767	1165	765	1163	268	188
15-10	889	1388	887	1386	315	242
15-12	978	1478	977	1476	315	242
15-14	1071	1570	1067	1568	315	242
15-17	1254	1750	1252	1749	315	242

MODEL	POWER(kW)	QH(m³/h)	3	6	9	12	15	18	21
15-1	1.1	H(m)	15	13	13	12	11	10	9
15-2	2.2		29	27	26	25	23	21	19
15-3	3.0		42	41	40	39	36	32	28
15-4	4.0		58	55	55	51	47	43	38
15-5	4.0		70	68	66	64	56	53	46
15-6	5.5		83	82	80	77	71	64	58
15-7	5.5		99	96	94	89	83	75	66
15-8	7.5		112	110	108	103	96	88	75
15-9	7.5		125	123	120	115	108	97	84
15-10	11.0		140	138	136	129	120	109	95
15-12	11.0		168	165	162	155	142	130	114
15-14	11.0		184	182	180	180	166	151	130
15-17	15.0		207	204	200	219	205	185	160