




TECHNICAL FEATURES

- Pump body: cast iron G20 with anti-corrosive coating
- Motor bracket: die casting aluminium UNI 5076 (cast iron for JET 152-302)
- Diffuser, Nozzle & Venturi tube : techno-polymer
- Impeller: techno-polymer (stamped brass UNI-EN 12165 JET 152-302)
- Pump shaft: stainless steel AISI 420F (AISI 304 for JET 152-302)
- Mechanical seal: carbon - ceramics

50 Hz - min⁻¹ ~ 2900

TIPO TYPE		Potenza nominale Nominal power		Potenza assorbita Input power [W]		Condensatore Capacitor 450 V max	Corrente assorbita Input current [A]			Portata - Capacity						
		MW	HP	a	b	[µF]	1~ 230 V	3~ 230 V	3~ 400 V	Q [m ³ /h]						
										Q [l/s]						
										Prevalenza (m C.A.) - Total head (m W.C.)						
										H	m					
										Efficiency	%					
										PS	Kw					
JET 63 M	-	0,44	0,6	600	-	12,5	2,6	-	-	H	m	35	24,6	22,3	19,9	13,8
										Efficiency	%	0	6,4	13,5	16,1	17,1
										PS	Kw	0,55	0,55	0,56	0,56	0,57
JET 81 M	JET 81 T	0,59	0,8	880	810	14	3	2,3	3,4	H	m	37,2	30,6	24,6	20,6	16
										Efficiency	%	0	9,2	14	18,8	17,8
										PS	Kw	0,6	0,61	0,62	0,63	0,64
JET 82 M	-	0,59	0,8	820	-	14	3,7	-	-	H	m	45	36	31	26	20
										Efficiency	%	0	13,6	14,8	17,5	18,9
										PS	Kw	0,73	0,74	0,76	0,77	0,78
JET 101 M	JET 101 T	0,74	1	980	940	16	4,55	4,1	2,4	H	m	46,9	40,3	34,5	29,6	25,6
										Efficiency	%	0	8,2	11	16,2	18,5
										PS	Kw	0,86	0,86	0,88	0,9	0,92
JET 102 M	JET 102 T	0,74	1	1040	1020	20	4,8	4	2,3	H	m	49,5	41,4	37,9	31	28,9
										Efficiency	%	0	8,2	12,4	15,5	18
										PS	Kw	0,98	0,94	0,96	0,97	0,98

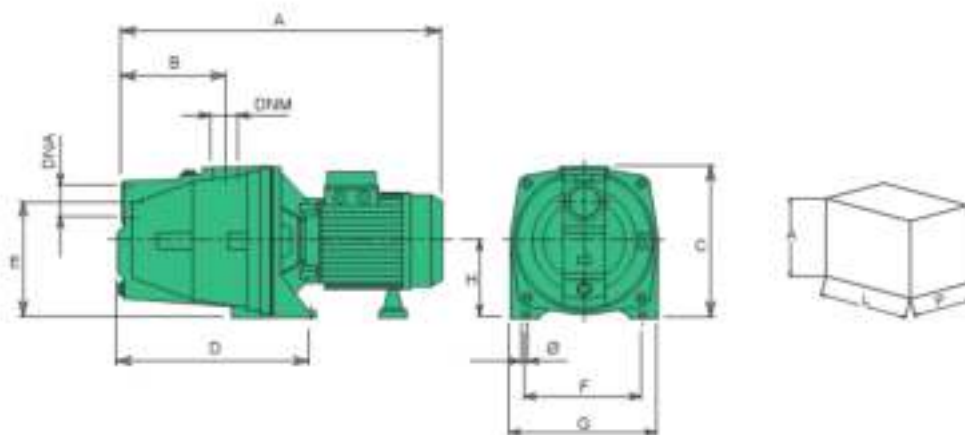

TIPO TYPE	DIMENSIONI [mm] DIMENSIONS [mm]											IMBALLO [mm] PACKING [mm]			PESO WEIGHT [kg]
	A	B	C	D	E	F	G	Ø	H	DNA	DNM	A	L	P	
JET 63	380	110	195	195	155	140	180	9	95	1"	1"	250	190	440	10
JET 81	380	110	195	195	155	140	180	9	95	1"	1"	250	190	440	10,2
JET 82	420	122	210	225	160	140	180	9	95	1"	1"	250	190	440	13
JET 101	410	110	210	195	155	140	180	9	95	1"	1"	250	190	440	14,7
JET 102	420	122	210	225	160	140	180	9	95	1"	1"	250	190	440	15,7