







ENGINEERING INFORMATION

TYPE 125162			CAPACITY								
			m ³ /h	2400	2360	2245	2115	1900	1750	1570	1100
KW	92	OUTLET 20 in	l/s	667	656	624	588	528	487	436	306
HP 125			HEIGHT								
			m	3	4	6	8	10	11	12	14
R.P.M	980	weight 1300 kg									

TYPE 125162A			CAPACITY								
			m ³ /h	1800	1700	1560	1400	1220	1000	750	
KW	92	OUTLET 20 in	l/s	500	473	434	389	339	278	209	
HP 125			HEIGHT								
			m	10	12	14	16	18	20	22	
R.P.M	1450	weight 1300 kg									

IP68 - CLASS F – 380/660 V (Y/Δ) - 180 A - 50HZ

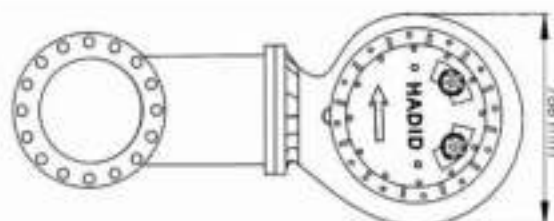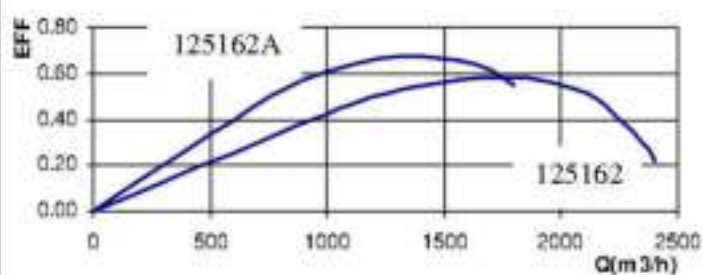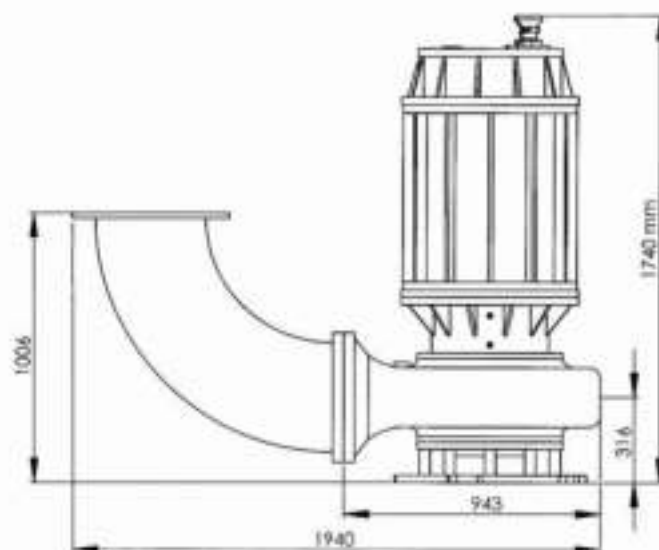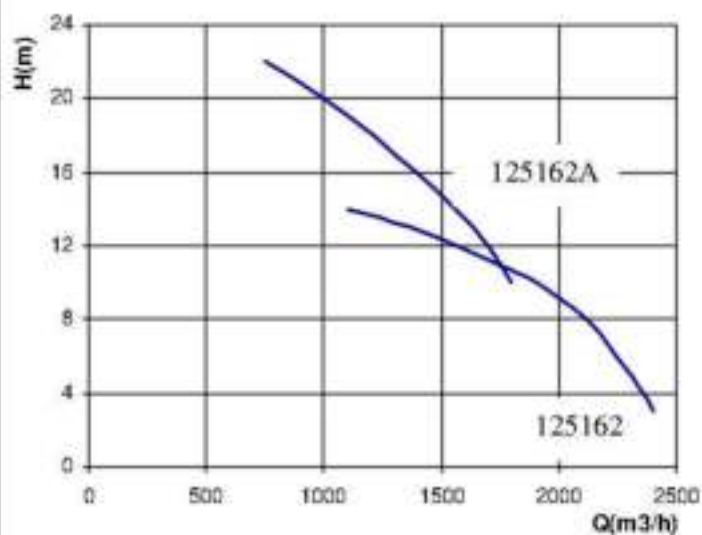



ENGINEERING INFORMATION

TYPE 125202			CAPACITY									
			m ³ /h	2300	2260	2145	2015	1800	1650	1470	1000	
KW	92	OUTLET 16 in	l/s	639	628	596	560	500	459	409	278	
HP 125			HEIGHT									
			m	5	6	8	10	12	13	14	16	
R.P.M	980	weight 1300 kg										

TYPE 125202A			CAPACITY									
			m ³ /h	1690	1600	1460	1300	1120	900	650		
KW	92	OUTLET 16 in	l/s	470	445	406	361	311	250	181		
HP 125			HEIGHT									
			m	14	16	18	20	22	24	26		
R.P.M	1450	weight 1300 kg										

IP68 - CLASS F – 380/660 V (Y/Δ) - 180 A - 50HZ

