






ENGINEERING INFORMATION

TYPE 100162A		CAPACITY											
		m ³ /h	2000	1940	1830	1720	1552	1400	1300	1152	1000		
KW 75	OUTLET 16 in	l/s	556	539	509	478	431	389	361	320	278		
HP 100		HEIGHT											
		m	5	6	8	10	12	13	14	15	16		
R.P.M 980	weight 1090 kg												

TYPE 100162B		CAPACITY											
		m ³ /h	960	940	920	840	710	650	560	415	320		
KW 75	OUTLET 16 in	l/s	267	261	256	234	197	181	156	115	89		
HP 100		HEIGHT											
		m	15	16	17	20	25	27	30	35	37		
R.P.M 1450	weight 1090 kg												

IP68 - CLASS F - 380/660 V (Y/Δ) - 140A - 50HZ

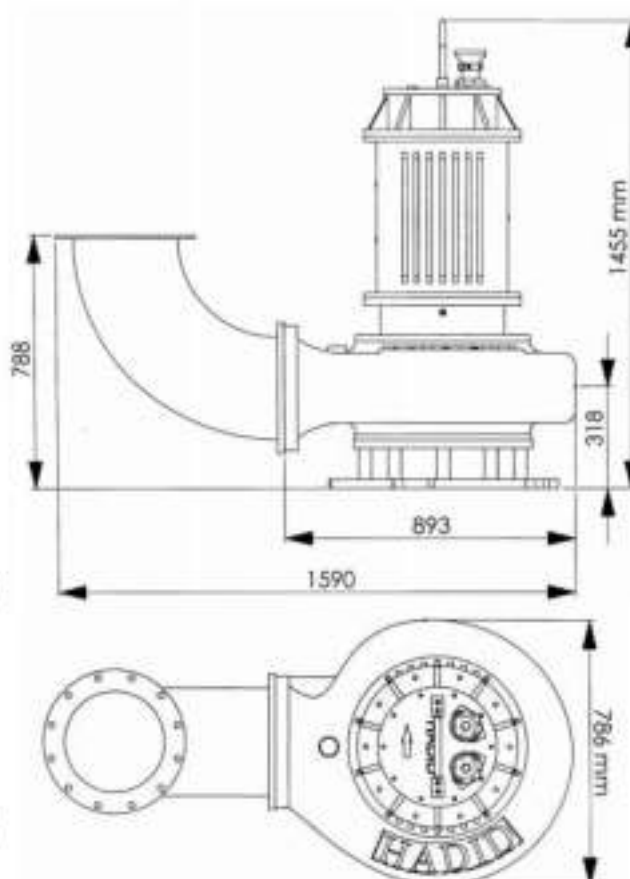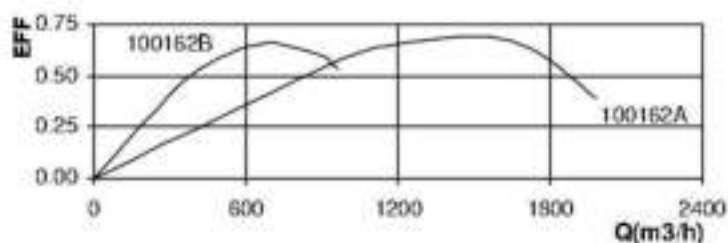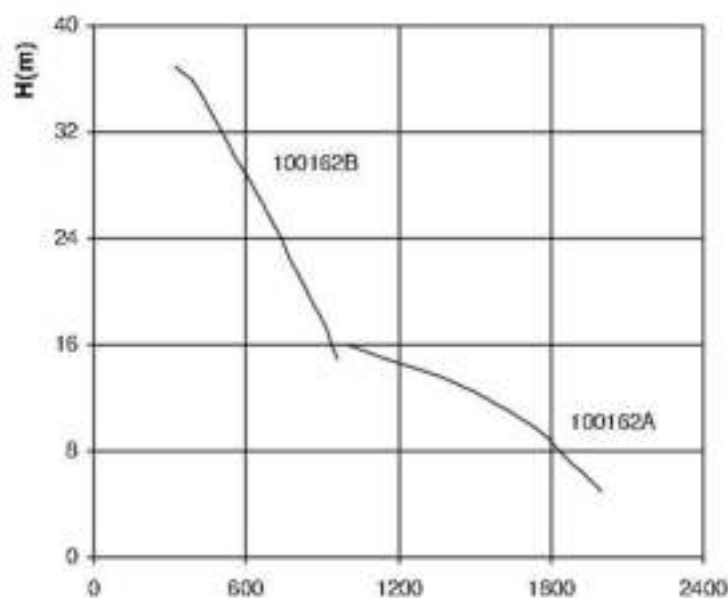



ENGINEERING INFORMATION

TYPE 100202A			CAPACITY											
			m ³ /h	2145	2050	1900	1725	1500	1390	1270	1150	1025		
KW	75	OUTLET 20 in	l/s	596	578	528	480	417	386	353	320	285		
HP 100			HEIGHT											
			m	3	4	6	8	10	11	12	13	14		
R.P.M	950	weight 1090 kg												

TYPE 100202B			CAPACITY											
			m ³ /h	1300	1250	1150	1065	960	880	730	620	380		
KW	75	OUTLET 20 in	l/s	361	348	320	296	267	245	203	172	106		
HP 100			HEIGHT											
			m	10	12	15	17	20	22	25	27	30		
R.P.M	1450	weight 1090 kg												

IP68 - CLASS F - 380/660 V (Y/Δ) - 140A - 50HZ

